



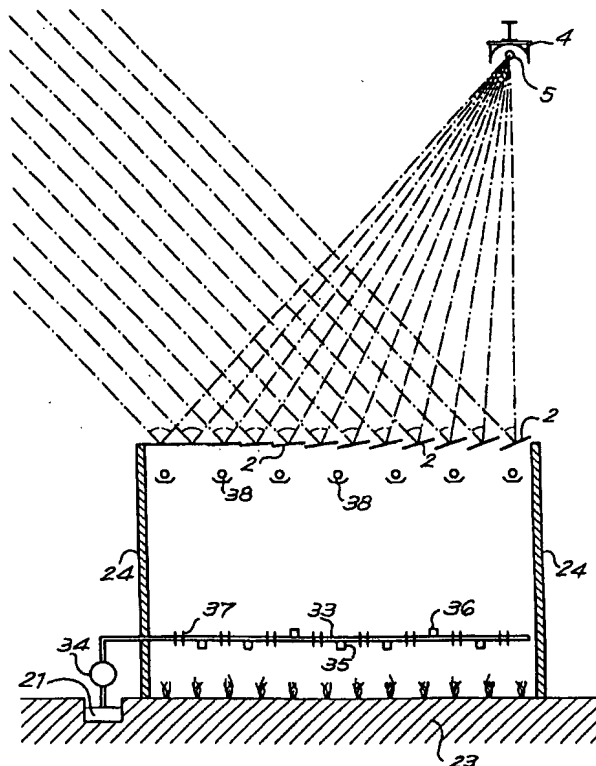
INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification 6 : A01G 9/24	A1	(11) International Publication Number: WO 99/53745 (43) International Publication Date: 28 October 1999 (28.10.99)
<p>(21) International Application Number: PCT/BE99/00050</p> <p>(22) International Filing Date: 14 April 1999 (14.04.99)</p> <p>(30) Priority Data: 1008903 16 April 1998 (16.04.98) NL</p> <p>(71) Applicant (for all designated States except US): SURIA HOLDINGS, SOCIETE A RESPONSABILITE LIMITEE [LU/LU]; 5, boulevard de la Foire, L-1528 Luxemburg (LU).</p> <p>(72) Inventors; and (75) Inventors/Applicants (for US only): VEN, Livien, Domien [BE/BE]; Desguinlei 206, B-2018 Antwerpen (BE). SUREDA, Michel [ES/BE]; Te Boelaarlei 121, B-2140 Borgerhout (BE).</p> <p>(74) Agent: DEBRABANDERE, René; Bureau de Rycker N.V., Arenbergstraat 13, B-2000 Antwerpen (BE).</p>	<p>(81) Designated States: AE, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, DE, DK, EE, ES, FI, GB, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, UA, UG, US, UZ, VN, YU, ZA, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SL, SZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).</p> <p>Published With international search report.</p>	

(54) Title: GREENHOUSE

(57) Abstract

Greenhouse consisting of a bottom (23), opaque and insulated standing walls (24) and a translucent roof, characterized in that the roof of the greenhouse (3) consists of longitudinal, almost flat strips (2) which are opaque and which can rotate around an axis of rotation directed in their longitudinal direction, whereby they make the top side of the greenhouse (3) practically light-tight when rotated in their horizontal or lying position, and in that means (27-30) are provided to rotate these strips (2).



FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece	ML	Mali	TR	Turkey
BG	Bulgaria	HU	Hungary	MN	Mongolia	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MR	Mauritania	UA	Ukraine
BR	Brazil	IL	Israel	MW	Malawi	UG	Uganda
BY	Belarus	IS	Iceland	MX	Mexico	US	United States of America
CA	Canada	IT	Italy	NE	Niger	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NL	Netherlands	VN	Viet Nam
CG	Congo	KE	Kenya	NO	Norway	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NZ	New Zealand	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	PL	Poland		
CM	Cameroon	KR	Republic of Korea	PT	Portugal		
CN	China	KZ	Kazakhstan	RO	Romania		
CU	Cuba	LC	Saint Lucia	RU	Russian Federation		
CZ	Czech Republic	LI	Liechtenstein	SD	Sudan		
DE	Germany	LK	Sri Lanka	SE	Sweden		
DK	Denmark	LR	Liberia	SG	Singapore		
EE	Estonia						

Greenhouse.

5 Greenhouse or glasshouse, consisting of a bottom, opaque
and insulated standing walls and a translucent roof.

In conventional greenhouses, the walls and the roof are
mainly formed of translucent material such as glass or
10 synthetic material.

The working of such a greenhouse is based on the fact
that the wavelength of the sunlight coming in through
said material is altered when it is reflected by the
15 ground or the plants in the greenhouse and in that said
wavelength is retained by the material, so that the heat
stays in the greenhouse.

When there is a lot of sun, the heat may become too high,
20 and the incidence of the solar rays is limited by putting
light-tempering mats on the roof.

Whereas such greenhouses give good results in regions
with a moderate climate, they cannot be used as such in
25 regions where there is a lot of sun, such as in deserts.

It is already known to build greenhouses in such regions
whose standing walls are opaque and insulated, whereas
collapsible mats are provided on the translucent roof,
30 equipped with reflectors, for example made of aluminium,
and which only transmit a restricted quantity of light.

The collapsible mats are relatively expensive and not
ultraviolet-resistant, so that they need to be replaced

regularly.

Moreover, even with these mats the greenhouse still needs to be cooled. Such cooling, for example by means of cooling air, requires extra energy and is thus relatively expensive. Moreover, it is very difficult to evenly cool the entire greenhouse.

The present invention aims a greenhouse which does not have the above-mentioned and other disadvantages and which is thus relatively inexpensive, and which allows for a good and even temperature regulation in the greenhouse with a minimum of energy consumption.

This aim is reached according to the invention in that the roof of the greenhouse consists of longitudinal, almost flat strips which are opaque and which can rotate around an axis of rotation directed in their longitudinal direction, whereby they make the top side of the greenhouse practically light-tight when rotated in their horizontal or lying position, and in that means are provided to rotate these strips.

The means for rotating the strips may be means to rotate them individually, to rotate them in groups of several strips or to rotate them all together.

Preferably, the strips can rotate around an axis situated halfway their width.

The roof of the greenhouse is usually flat and horizontal.

The bottom side of the strips may reflect the light in a

diffused manner.

On the top side, the strips are preferably reflecting,
which implies that the strips are flat, longitudinal
5 mirrors.

The above-mentioned means for rotating the strips are
then also means to direct the mirrors towards the sun.

10 They are preferably directed in the east/westward
direction and thus follow the movement of the sun
according to the seasons.

The above-described greenhouse in which the strips are
15 mirrors, is particularly interesting as part of a device
for producing steam which can be used in a steam turbine
for the production of electricity or in an evaporator for
desalinating seawater, whereby at least one collector is
erected above the mirrors in which fluid is heated.

20 Through the greenhouse can be provided a pipe through
which flows cooling water and/or the produced fresh water
to heat the greenhouse and/or to water the plants in the
greenhouse by means of sprinklers connected to it or in
25 order to guarantee the required humidity level in the
greenhouse.

In order to better explain the characteristics of the
invention, the following preferred embodiments of a
30 greenhouse according to the invention are described as an
example only without being limitative in any way, with
reference to the accompanying drawings, in which:

figure 1 schematically represents a device for using

solar energy of which greenhouses according to the invention form a part;

figure 2 schematically represents a cross section of a greenhouse according to the invention from the device in figure 1;

figure 3 shows a section analogous to that in figure 2, but with reference to another position of the mirrors;

figure 4 represents the detail indicated by F4 in figure 3 to a larger scale;

figures 5, 6 and 7 schematically represent the position of the mirrors for one greenhouse at three different moments of the day.

15 The device for using solar energy which is schematically represented in figure 1 contains a device 1 for producing steam which mainly consists of several series, three in the example represented, of parallel, strip-shaped, rotatable flat mirrors 2, forming the roof of greenhouses 3, a collector 4-5 in the shape of a longitudinal, bent mirror 4 above every series of mirrors 2 which is directed with its opening towards the flat mirrors 2, and a pipe 5 extending under the successive collectors 4.

25 The mirrors 2 extend with their longitudinal direction in the east/westward direction and can rotate around a geometrical axis which extends halfway their width in their longitudinal direction.

30 The collectors 4-5 are also directed in the longitudinal direction of the mirrors 2.

The construction of the mirrors 2 and their rotation will be further explained in detail together with the

construction and the working of the greenhouses 3.

The pipe 5 is connected downstream to a water supply pipe 6 in which is provided a pump 7, and upstream to a steam
5 pipe 8.

The steam pipe 8 is connected to the water supply pipe 6 by a first pipe 9 in which are successively provided a cock 10, a steam turbine 11 onto which is coupled a
10 generator 12, a condenser 13 and a second cock 14 on the one hand, and by a second pipe 15 in which are successively provided a cock 16, an evaporator 17 and a second cock 18 on the other hand.

15 Through the evaporator 17 extends a secondary pipe 19 in which is provided a condenser 20 and which opens in a duct 21 which extends along the greenhouses 3, whereby the cooling pipe 22 extends through this condenser 20.

20 The working of such a device 1 for producing and utilizing steam is as follows.

The strip-shaped flat mirrors 2 forming the roofs of the greenhouses 3 reflect the collected solar radiation to
25 the bent mirror 4 erected on top of them, which further reflects this radiation to the pipe 5.

As a result of this, water is then heated under the successive mirrors 4 in this pipe 5, this water is
30 evaporated into steam and this steam is overheated.

This overheated steam flows via the steam pipe 8 to the pipes 9 and 15 in a proportion which is determined by the position of the cocks 10 and 14, 16 and 18 respectively.

The steam in the pipe 9 drives the steam turbine 11 which drives the generator 12, whereas the used and condensed steam flows back to the pipe 5 via the water supply pipe 6 to be heated again and to be transformed into
5 overheated steam.

The steam in the pipe 15 makes sure that seawater which is supplied through the pipe 19 is evaporated in the evaporator 17. The steam which is produced there, is
10 condensed into fresh water in the condenser 20 which is supplied to the duct 21.

Characteristic for the invention are the greenhouses 3 which are analogous to what is called a phytotron, with
15 this major difference, however, that all the energy is supplied by the sun and that the light is not provided by lamps but consists of sunlight.

As in a phytotron, as represented in figures 2 and 3,
20 each greenhouse 3 consists of a bottom 23 and four standing walls 24 which are opaque and heavily thermally insulated.

As already mentioned, the roof of every greenhouse 3 is
25 formed of a series of mirrors 2.

Every mirror 2 consists of a strip 25 having a width of for example some 50 cm and a length of about 10 m, whose top side is reflective, for example coated with a
30 reflective foil or a reflective layer, and whose bottom side reflects the light in a diffused manner, for example which is coated with a layer which reflects the light in a diffuse manner.

The strip 25, as represented in detail in figure 4, is fixed with its bottom side to a pipe 26 which is bearing-mounted in several places in a frame in a manner which is not represented.

5

The mirrors 2 can rotate around an axis in their longitudinal direction, either all together or individually, but preferably in groups of several mirrors, for example four, which coincides with the axis
10 of their pipe 26, by means of a motor 27 through the agency of a transmission which contains a chain 28 in the given example running over chain wheels 29 at one end of the pipes 26 and a chain wheel 30 on the shaft of the motor 27.

15

The motors 27 are controlled by means of a control device, such that the mirrors 2 are normally directed with their reflective top side towards the sun and reflect onto the mirror 4, but if required this
20 embodiment can be deviated from.

The mirrors 2 thus follow the movement of the sun, i.e., since they are directed in the east/westward direction, the seasonal movement of the sun following an angle of
25 46° between summer and winter.

Figures 2 and 3 represent the situation at the thirtieth degree of latitude. In the early part of the winter, the solar rays form an angle of 53° with the zenith here, as
30 represented in figure 2, and in the early part of the summer, they form an angle of 7° with said zenith, as represented in figure 3.

At this degree of latitude, the sun thus remains on one

side of the zenith. The only collector 4-5 which extends in the east/westward direction is therefore situated above the most northward situated mirror 2 of the series forming a roof.

5

It is clear that a number of mirrors 2 reflecting solar rays to this collector 4-5 are rotated.

10 This implies that sunlight falls directly in the greenhouse 3 between two neighbouring rotated mirrors 2, as is represented in figure 4 by means of the chain lines 31. The distance between these chain lines 31 represents the width of the beam of rays falling in the greenhouse 3.

15

Between these neighbouring mirrors 2 also penetrates diffused light, as represented by the arrows 32 in figure 4.

20 When two neighbouring mirrors 2 are situated in their horizontal position, they practically touch, so that neither direct light, nor diffused light can penetrate in between them into the greenhouse 3.

25 Through every greenhouse 3 extend pipes 33 which are connected to the duct 21 via a pump 34. In the greenhouse 3, these pipes 33 are provided with adjustable, downward directed sprinklers 35 and adjustable, upward directed sprinklers 36. Further, fins
30 37 can be provided on certain pipes 33 for the heat exchange with the space inside the greenhouse 3.

Under the roof are provided fittings with tube lights 38 of the type which is especially designed for casting

light on plants.

These fittings have upward directed reflectors, such that the light of the tube lamps 38 is reflected towards the roof and thus towards the mirrors 2.

The working of the above-described greenhouses 3 is as follows.

Early in the morning, the sun is still too low above the horizon and the solar radiation is not sufficient to produce overheated steam in the pipe 5.

Said solar radiation is therefore used entirely for the plants in the greenhouse 3 and all the mirrors 2 are placed almost vertically as is schematically represented in figure 5. Thanks to the bottom side of the mirrors 2 reflecting the light in a diffused manner, this radiation is reflected in the greenhouse 3 as diffused light.

As soon as the solar radiation makes it possible to produce enough steam, the mirrors 2 are rotated such that they reflect the solar rays to the collector 4-5, and the cocks 10 and 14 are opened first and, if the amount of steam is sufficient to make also the evaporator 17 work, also the cocks 16 and 18 will be subsequently opened.

At noon, when the sun is situated at its highest point above the horizon, the mirrors 2 are in the position as represented in figure 2 in the early part of the winter, and in the position as represented in figure 3 in the early part of the summer.

Between the rotated mirrors 2, a small amount of direct

solar radiation will thus enter the greenhouse 3, whereas a large amount of diffused light is spread in the greenhouse 3. Besides, too much direct sunlight is disadvantageous for the photosynthesis of most plants.

5

If all the solar radiation would fall directly on the plants in the greenhouse 3, these plants would burn. Shadow plants for example, only require a radiation energy of 200 to 300 Watt per m^2 , whereas in the desert
10 the solar radiation amounts to 1000 Watt per m^2 .

It should be noted that in the winter, the mirrors 2 are on average inclined more than in the summer, so that during the winter, when there is sunlight for a shorter
15 length of time, comparatively more diffused light falls in the greenhouse 3, such that the total amount of diffused light does not differ much in summer and in winter.

20 The surface of the mirrors 2 is generously calculated, so that during a large part of the day and especially around noon, more solar radiation is reflected by the mirrors 2 then required for the steam production.

25 This surplus is prevented from reaching the collector 4-5 and is led to the inside of the greenhouse 3, partly in the form of diffused light, by successively rotating different groups of a number of mirrors 2, in the given example four, in their almost vertical position, as is
30 schematically represented in figure 6.

Through the bottom sides of the mirrors 2 which reflect the light in a diffused manner, a large quantity of diffused light thus enters the inner space of the

greenhouse 3 between said mirrors 2, such that a sufficient amount of energy enters the greenhouse 3 to allow for an optimum photosynthesis of the plants.

- 5 By successively or sequentially rotating other mirrors 2, other parts of the greenhouse 3 are each time cast light on.

10 At night, all the mirrors 2 forming the roof of a greenhouse 3 are rotated in their horizontal position, as is schematically represented in figure 7, so that as little heat as possible escapes from the space inside the greenhouse 3. Light is cast on the plants by the tube
15 lamps 38, whose light is reflected in a diffused manner in the above-mentioned space by the bottom sides of the mirrors 2 reflecting it in a diffused manner.

The steam for the steam turbine 11 and the desalination must then be produced in conventional ways by a steam
20 boiler.

As the general power consumption is lower at night than during the day, part of the current can easily be used for the tube lamps 38.

25

As the incident rays mainly come in in a diffused manner and are spread over a large surface, the space inside the greenhouse 3 hardly heats up. Besides, the entering or released heat is situated at a relatively large distance
30 from the bottom 23, for example at four metres, and escapes immediately through the gaps between the rotated mirrors 2.

Thus, even more heat is extracted from the space, so that

it will have to be heated in order to maintain the required temperature for an ideal photosynthesis.

5 This is realized by pumping desalinated water from the duct 21 through the pipe 33 equipped with fins 37 into the greenhouse 3. The water in this duct 21 is condensed steam from the condenser 20 which has been condensed by seawater at for example 30 to 35°C and which has a temperature of about 40°C or more.

10

This same water is also used to water the plants when necessary by means of remote-controlled adjustable sprinklers 35 in pipes 33 and to obtain the required humidity level in the greenhouse 3 by means of remote-
15 controlled adjustable sprinklers 36.

Any remaining water can be used to cool the condenser 13 or the steam turbine 11.

20 During the day, the greenhouses 3 thus do not consume any other energy than solar energy. The entire device 1 will even produce a considerable surplus of electricity which can be used for all purposes, for example for the energy supply of air conditioning appliances. This device also
25 produces the necessary water for the plants.

Thus, the whole is very economical, and an optimal growth of the plants can be guaranteed in an easy way.

30 It is clear that the number of greenhouses 3 is not limited to three. An entire field of several hectares can be formed in this way.

The roof of every greenhouse must not necessarily consist

13

of just one series of mirrors 2. The roof of a single greenhouse 3 may contain several series of mirrors 2; likewise, also a single series of mirrors 2 may form the roof of several greenhouses 3.

5

The collector 4-5 must not necessarily be situated above an extreme mirror 2. Also more than one collector 4-5 can be erected above a series of mirrors 2.

10 The mirrors 2 must not necessarily be directed in the east/westward direction. They may also be directed with their longitudinal direction north/southward, in which case the mirrors 2 which are used for the production of steam follow the sun in the course of the day.

15

In this case as well, groups of mirrors 2 are sequentially rotated such that they do not reflect any light towards the collector 4-5, but reflect diffused light in the greenhouse 3.

20

Although it is extremely advantageous when the greenhouses 3 form part of a device 1 for producing steam with which the necessary electricity for for example the devices in the greenhouses 3 and, if necessary, also the
25 required fresh water can be produced, this is not absolutely necessary. The mirrors 2 may then be replaced by strips which are not reflective on the top side.

The invention is by no means restricted to the above-
30 described embodiment as represented in the accompanying drawings; on the contrary, such a greenhouse can be made in all sorts of variants while still remaining within the scope of the invention.

Claims.

- 5 1. Greenhouse consisting of a bottom (23), opaque and insulated standing walls (24) and a translucent roof, characterized in that the roof of the greenhouse (3) consists of longitudinal, almost flat strips (2) which are opaque and which can rotate around an axis of
10 rotation directed in their longitudinal direction, whereby they make the top side of the greenhouse (3) practically light-tight when rotated in their horizontal or lying position, and in that means (27-30) are provided to rotate these strips (2).
- 15 2. Greenhouse according to claim 1, characterized in that the means (27-30) to rotate the strips (2) are means to rotate them either individually or in groups of several strips or all together.
- 20 3. Greenhouse according to claim 1 or 2, characterized in that the strips (2) can rotate around an axis situated halfway their width.
- 25 4. Greenhouse according to any of the preceding claims, characterized in that the roof is flat and horizontal.
5. Greenhouse according to any of the preceding claims, characterized in that the bottom side of the strips (2)
30 reflects the light in a diffused manner.
6. Greenhouse according to any of the preceding claims, characterized in that, on the top side, the strips are reflective, which implies that the strips are flat,

longitudinal mirrors (2), and in that the above-mentioned means (27-30) for rotating the strips are also means for directing the mirrors (2) towards the sun.

5 7. Greenhouse according to claim 6, characterized in that the mirrors are directed in the east/westward direction and thus can follow the movement of the sun according to the seasons.

10 8. Greenhouse according to claim 6 or 7, characterized in that it is part of a device (1) for producing steam which is used in a steam turbine (11) for the production of electricity and/or in an evaporator (17) for desalinating seawater, whereby at least one collector (4-5) is erected
15 above the mirrors (2) in which fluid is heated.

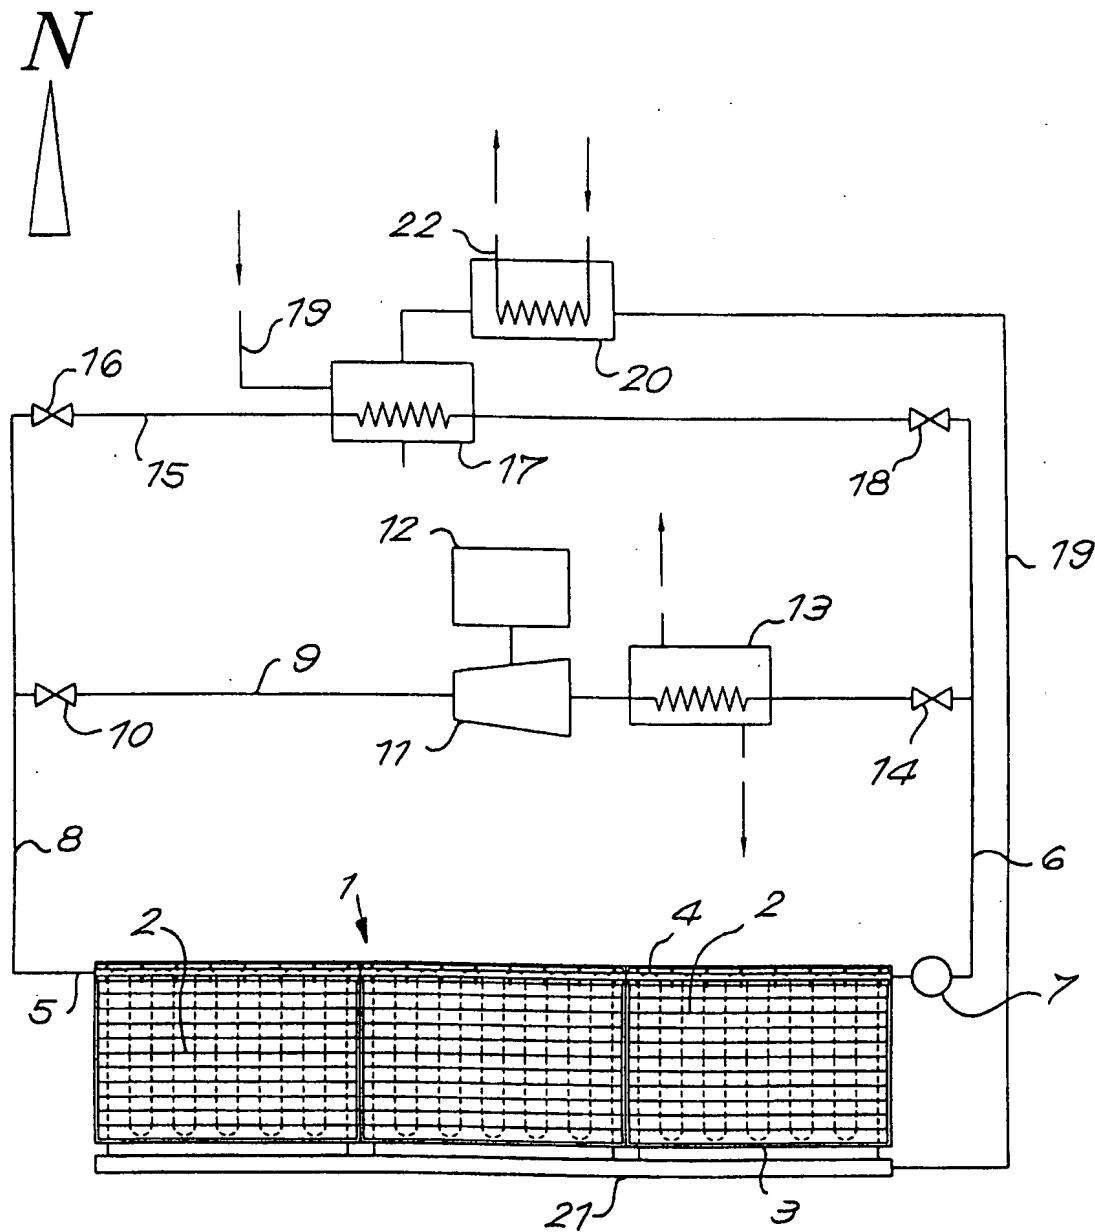
9. Greenhouse according to claim 8, characterized in that a pipe (33) is provided through it through which flows cooling water and/or the produced fresh water to heat the
20 greenhouse (3) and/or to water the plants in the greenhouse by means of sprinklers (35-36) connected to it and/or to guarantee the required humidity level in the greenhouse (3).

25 10. Greenhouse according to claims 2, 5 and 8, characterized in that the means (27-30) for rotating the mirrors (2) of a greenhouse (3) are controlled such by a control device that, when there is little solar radiation, they are all turned standing, such that light
30 is reflected inside the greenhouse (3) by the side of said mirrors (2) reflecting the light in a diffused manner, and that when there is a sufficient amount of solar radiation for the production of steam, they are directed towards the sun and towards the collector (4-5)

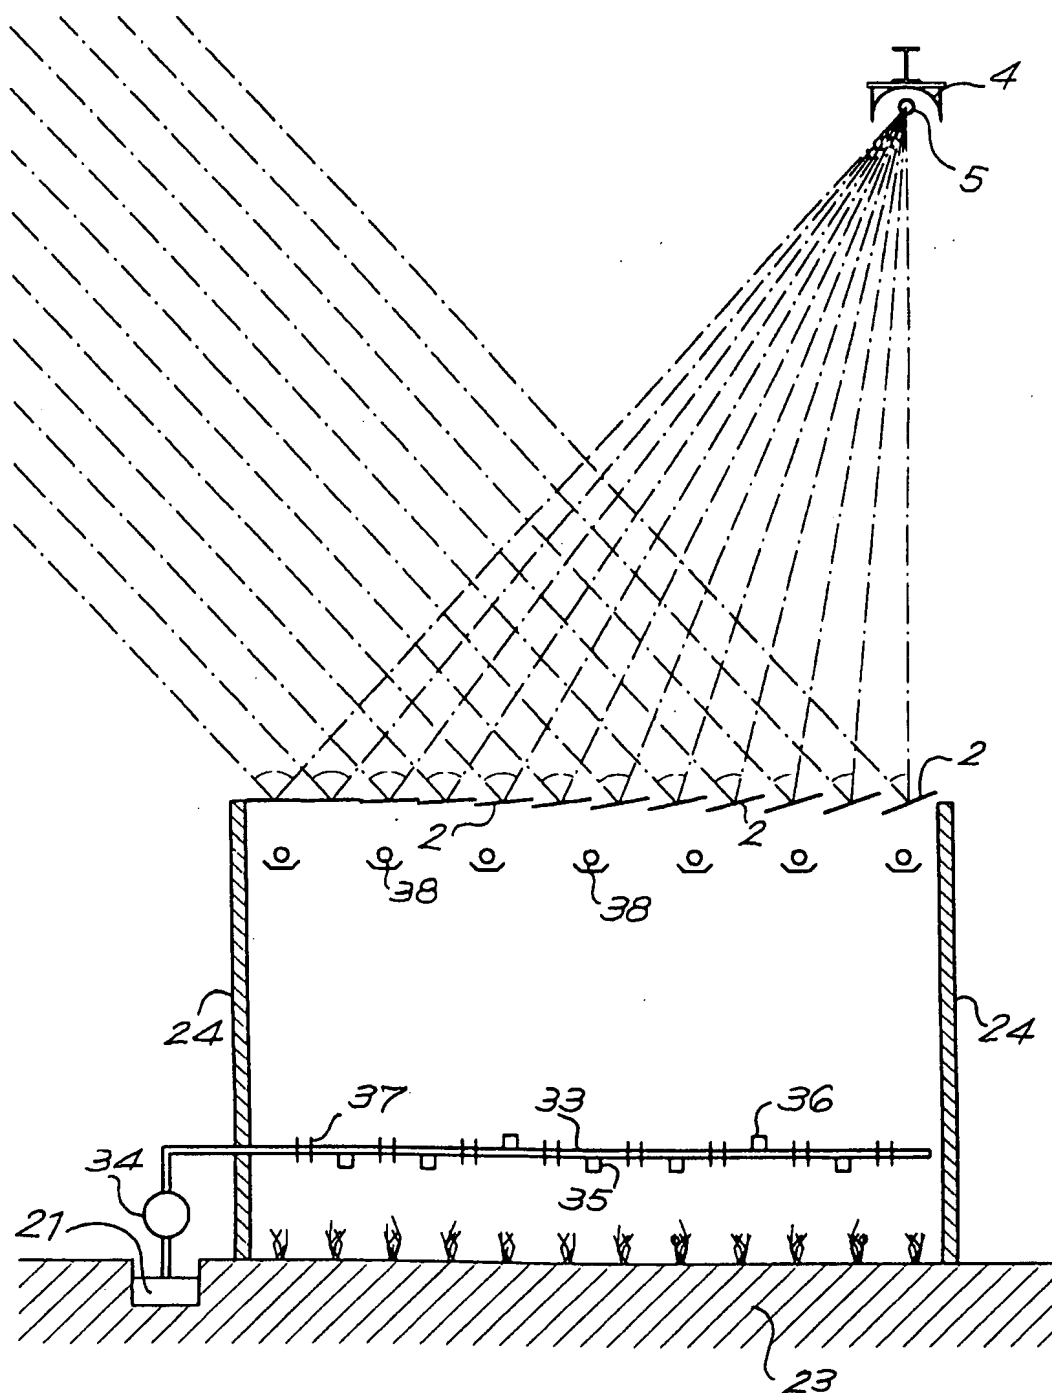
16

with possibly a sequential group of mirrors (2) which are also turned standing so as to also reflect the solar radiation in a diffused manner inside the greenhouse (3).

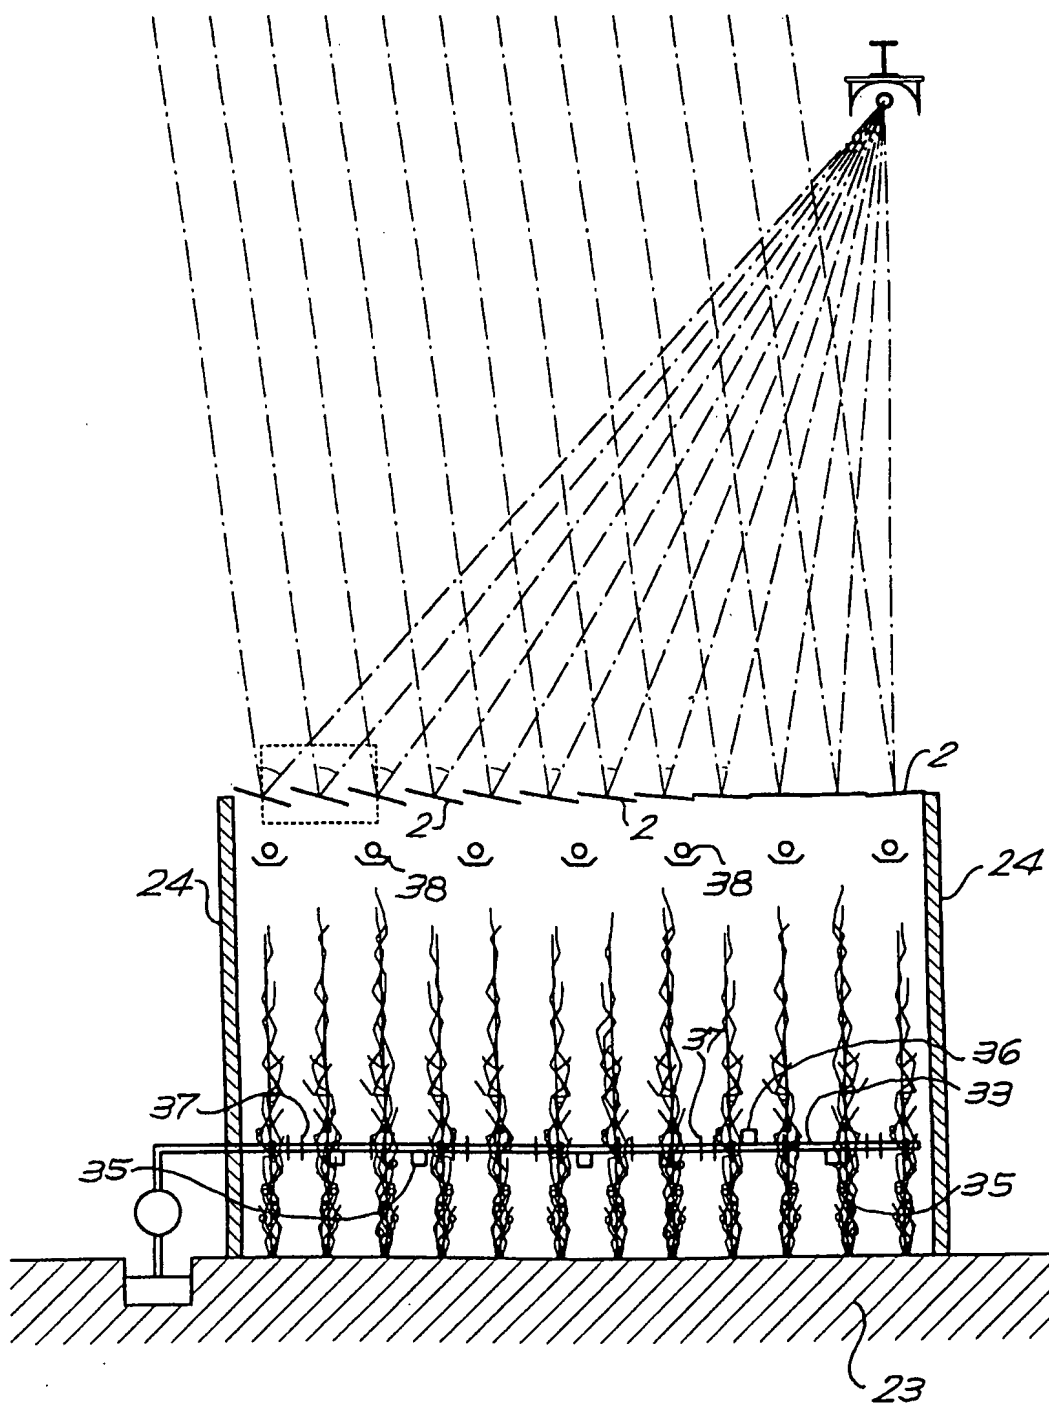
5

*Fig. 1*

2/4

*Fig. 2*

3/4

*Fig. 3*

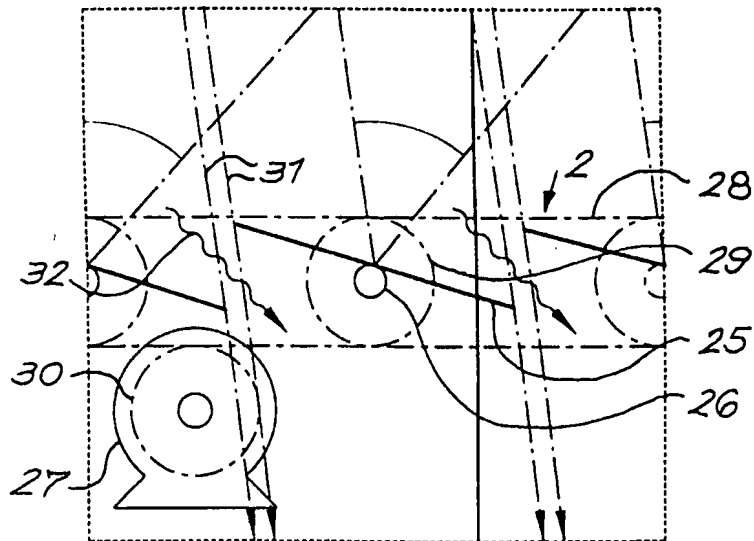


Fig. 4



Fig. 5



Fig. 6



Fig. 7

INTERNATIONAL SEARCH REPORT

International Application No

PCT/BE 99/00050

A. CLASSIFICATION OF SUBJECT MATTER
IPC 6 - A01G9/24

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 6 A01G

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	GB 2 215 357 A (OGLE JOHN HADLOW) 20 September 1989 see page 1, last paragraph	1-6, 8
A		7
Y	EP 0 371 000 A (ELBAK BATTERIEWERKE GMBH) 30 May 1990 see the whole document	1-6
Y	US 4 095 369 A (POSNANSKY MARIO ET AL) 20 June 1978 see the whole document	8
A		1-4, 6, 9, 10
	--- -/--	

☒ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

* Special categories of cited documents :

"A" document defining the general state of the art which is not considered to be of particular relevance
 "E" earlier document but published on or after the international filing date
 "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
 "O" document referring to an oral disclosure, use, exhibition or other means
 "P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
 "X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
 "Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
 "&" document member of the same patent family

Date of the actual completion of the international search

25 June 1999

Date of mailing of the international search report

05/07/1999

Name and mailing address of the ISA
 European Patent Office, P.B. 5818 Patentlaan 2
 NL - 2280 HV Rijswijk
 Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
 Fax: (+31-70) 340-3016

Authorized officer

Merckx, A

INTERNATIONAL SEARCH REPORT

International Application No

PCT/BE 99/00050

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 4 219 008 A (SCHULTZ JOHN) 26 August 1980 see column 2, line 65 - column 4, line 43; figures ----	1-3
A	US 4 312 157 A (HERTEL ROGER D ET AL) 26 January 1982 see the whole document -----	1,2,4

INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/BE 99/00050

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
GB 2215357	A	20-09-1989	NONE	
EP 0371000	A	30-05-1990	AT 394622 B	25-05-1992
US 4095369	A	20-06-1978	CH 601972 A	14-07-1978
			AT 351855 B	27-08-1979
			AU 505182 B	08-11-1979
			AU 2353177 A	28-09-1978
			BR 7701843 A	17-01-1978
			CA 1054369 A	15-05-1979
			DK 121677 A	25-09-1977
			EG 13507 A	31-12-1981
			FR 2345068 A	21-10-1977
			GB 1563655 A	26-03-1980
			IN 145708 A	02-12-1978
			JP 52131852 A	05-11-1977
			NL 7702948 A	27-09-1977
			SE 7703331 A	25-09-1977
US 4219008	A	26-08-1980	NONE	
US 4312157	A	26-01-1982	AU 536702 B	17-05-1984
			AU 7017681 A	26-11-1981
			GR 75633 A	01-08-1984
			JP 1321780 C	11-06-1986
			JP 57039719 A	05-03-1982
			JP 60043090 B	26-09-1985
			ZA 8103357 A	26-05-1982

Form PCT/ISA/210 (patent family annex) (July 1992)